

# Stainless Steel Spikes



See website for current pricing.

**3/4" standard mesh bird netting** seals off all structural openings and other possible roosting sites.

- **Simple, cost-effective solution for homeowners and gardeners**
- Lightweight, pliable, and UV-stabilized
- Won't deteriorate or lose strength when exposed to the elements
- Seals off all structural openings and other possible roosting sites
- Allows light and moisture in
- Also excludes bats

## Customer Testimonial

***I have solved my pigeon problem*** by covering the entire opening to my balcony with bird netting attached to a 2x2 frame.

—Lynda

## Details

- 3/4" standard mesh netting
- 100% effective everywhere it is installed – great for zero-tolerance zones
- Straightforward, one-time installation
- Durable and weatherproof
- Keeps pests out while allowing light and moisture in
- Nearly invisible – netting is barely visible at a distance
- Works to deter birds and other critters

## Applications


Repels all pest birds; also deters animals such as bats, deer, skunks, raccoons, etc.

Effective everywhere it is installed; various sizes available.  
Recommended for excluding birds from specific areas, such as:

- Homes, garages & rafters
- Air conditioners, gutters & pipes
- Trees & gardens
- Crops & vineyards
- Etc.

## Benefits

- Cut recurring cleanup and repair costs with a one-time solution
- Stop birds from entering, roosting and nesting in areas where they are unwanted, or from eating fruit or crops
- Protect buildings and equipment from corrosive droppings
- Reduce health and liability risks associated with pest bird infestation
- Prevent the spread of diseases, such as West Nile, Salmonella, E. Coli, Histoplasmosis and even rabies (found in bats)
- Eliminate fire hazards caused by birds building nests in vents and chimneys
- Avoid government and safety inspection failures
- Decrease nuisance for workers, customers, etc.

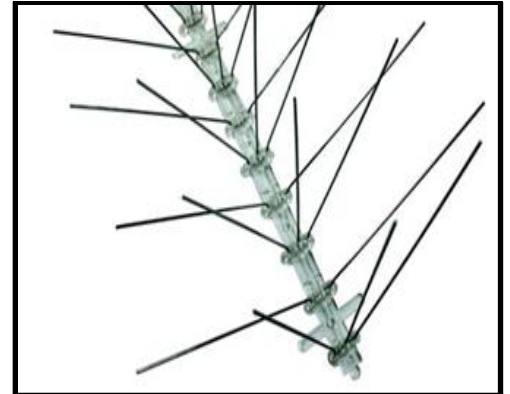

## Specs

### Regular

Highest point: 4.3"  
Base width: 0.5"  
Top width: 5"

Lengths: 10', 24', 50', and 100'

### Narrow

Highest point: 4.3"  
Base width: 0.5"  
Top width: 1.5"

Lengths: 10', 24', 50', and 100'

### Wide

Highest point: 4.3"  
Base width: 0.5"  
Top width: 7"

Lengths: 10', 24', 50', and 100'

<b>SKU #</b>	<b>STS</b>	<b>SLS</b>	<b>EWS</b>
	(regular)	(narrow)	(wide)

## 10-Year Warranty

Backed by our manufacturer's warranty against material defects and workmanship.